

## Sealed Subminiature Basic Switch

# D2SW

### High-quality Sealed Miniature Basic Switch Conforming to IP67 (Lead wire type only)

- Monoblock construction assures high sealing capability and is ideal for dusty places or where water is sprayed.
- A wide operating temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  is ideal for any operating environment.
- Ideal for the automobile, agricultural machinery, automatic vending machine, refrigerator, ice-manufacturing, bath equipment, hot-water supply, air conditioner, and factory machine industries, which require highly environment-resistive capabilities.



## Ordering Information

### Model Number Legend

D2SW-    

1   2   3   4

#### 1. Ratings

- 01: 0.1 A
- 3: 3 A

#### 2. Actuator

- None: Pin plunger
- L1: Hinge lever
- L2: Hinge roller lever
- L3: Simulated hinge lever

#### 3. Contact Form

- None: SPDT
- 2: SPST-NC (Lead wire model only)
- 3: SPST-NO (Lead wire model only)

#### 4. Terminals

- H: Solder terminal (HS for UL and CSA approval)
- D: PCB terminal (DS for UL and CSA approval)
- T: Quick-connect terminal (#110) (TS for UL and CSA approval)
- M: With lead wire (MS for UL and CSA approval)

### List of Models

Actuator	Model		
		3 A	0.1A
<b>Pin plunger</b> 	Solder terminals	D2SW-3H	D2SW-01H
	Quick-connect terminals (#110)	D2SW-3T	D2SW-01T
	PCB terminals	D2SW-3D	D2SW-01D
	With lead wires	D2SW-3M	D2SW-01M
<b>Hinge lever</b> 	Solder terminals	D2SW-3L1H	D2SW-01L1H
	Quick-connect terminals (#110)	D2SW-3L1T	D2SW-01L1T
	PCB terminals	D2SW-3L1D	D2SW-01L1D
	With lead wires	D2SW-3L1M	D2SW-01L1M
<b>Simulated hinge lever</b> 	Solder terminals	D2SW-3L3H	D2SW-01L3H
	Quick-connect terminals (#110)	D2SW-3L3T	D2SW-01L3T
	PCB terminals	D2SW-3L3D	D2SW-01L3D
	With lead wires	D2SW-3L3M	D2SW-01L3M
<b>Hinge roller lever</b> 	Solder terminals	D2SW-3L2H	D2SW-01L2H
	Quick-connect terminals (#110)	D2SW-3L2T	D2SW-01L2T
	PCB terminals	D2SW-3L2D	D2SW-01L2D
	With lead wires	D2SW-3L2M	D2SW-01L2M

**Note:** The standard lengths of the lead wires (AV0.5f) of models incorporating them are 30 cm.

# Specifications


## ■ Ratings

Model	Rated voltage	Non-inductive load				Inductive load			
		Resistive load		Lamp load		Inductive load		Motor load	
		NC	NO	NC	NO	NC	NO	NC	NO
D2SW-3	125 VAC	3 A		1 A	0.5 A	1 A	0.5 A	1 A	0.5 A
	250 VAC	2 A		0.5 A	0.3 A	0.5 A	0.3 A	0.5 A	0.3 A
	30 VDC	3 A		1 A		1 A		1 A	
D2SW-01	125 VAC	0.1 A		---		---		---	
	30 VDC	0.1 A		---		---		---	

- Note:**
- The above current ratings are the values of the steady-state current.
  - Inductive load has a power factor of 0.7 min. (AC) and a time constant of 7 ms max. (DC).
  - Lamp load has an inrush current of 10 times the steady-state current.
  - Motor load has an inrush current of 6 times the steady-state current.
  - The ratings values apply under the following test conditions:  
Ambient temperature: 20±2°C  
Ambient humidity: 65±5%  
Operating frequency: 30 operations/min

Model	D2SW-01	D2SW-3
Minimum applicable load	1 mA at 5 VDC	160 mA at 5 VDC

Use the Switch in the following operation range.

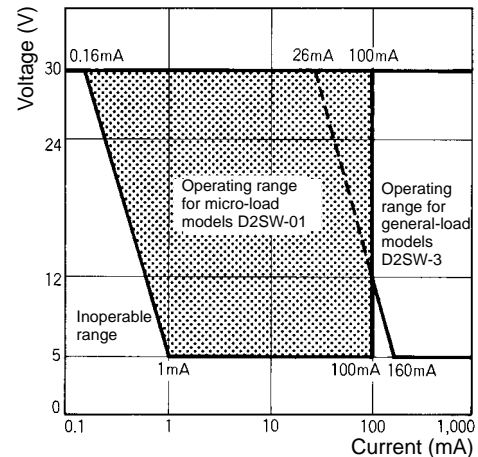

## ■ Characteristics

Item	D2SW-3	D2SW-01
Operating speed	0.1 mm to 1 m/s (at pin plunger models)	
Operating frequency	Mechanical: 300 operations/min Electrical: 60 operations/min	
Insulation resistance	100 MΩ min. (at 500 VDC)	
Contact resistance	30 mΩ max. (initial value) for terminal models	50 mΩ max. (initial value) for terminal models
	50 mΩ max. (initial value) for lead wire models	70 mΩ max. (initial value) for lead wire models
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between terminals of the same polarity	600 VAC, 50/60 Hz for 1 min between terminals of the same polarity
	1,500 VAC, 50/60 Hz for 1 min between current-carrying metal parts and ground, and between each terminal and non-current-carrying metal parts (see note 1)	1,500 VAC, 50/60 Hz for 1 min between current-carrying metal parts and ground, and between each terminal and non-current-carrying metal parts (see note 1)
Vibration resistance (see note 2)	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude	
Shock resistance (see note 2)	Malfunction: 300 m/s <sup>2</sup> (approx. 30G) max.	
Life expectancy (see note 3)	Mechanical: 5,000,000 operations min. (OT value)	
	Electrical: 200,000 operations min. (3 A at 125 VAC), 100,000 operations min. (2 A at 250 VAC)	Electrical: 200,000 operations min.
Degree of protection	IP67 for lead wire models IP50 for terminal models	
Proof tracking index (PTI)	175	
Switch category (IEC335-1)	A (IEC335)	
Degree of protection against electric shock	Class 1	
Ambient temperature	Operating: -40°C to 85°C (with no icing)	
Ambient humidity	Operating: 95% max. (for 5°C to 35°C)	
Weight	Approx. 2 g (for a pin plunger model with terminal)	

- Note:**
- The dielectric strength shown is for models with a Separator.
  - For the pin plunger models, the above values apply for use at the free position, operating position, and total travel position. For the lever models, they apply at the total travel position.
  - For testing conditions, contact your OMRON sales representative.

■ Approved Standards

UL1054 (File No. E41515)  
 CSA C22.2 No.55 (File No. LR21642)

Rated voltage	D2SW-3□	D2SW-01□
125 VAC 250 VAC	3 A 2 A	0.1 A ---
30 VDC	3 A	0.1 A

VDE/EN61058-1 (IEC601058-1) (File No. 85002)

Rated voltage	D2SW-01□H
125 VAC	0.1 A

Testing conditions: 5E4 (50,000 operations), T85 (0°C to 85°C)

■ Contact Specifications


Item		D2SW-3	D2SW-01
Contact	Specification	Rivet	Crossbar
	Material	Silver	Gold alloy
	Gap (standard value)	0.5 mm	0.5 mm
Inrush current	NC	20 A max.	1 A max.
	NO	10 A max.	1 A max.

■ Separators (Insulation Sheet)

Applicable switch	Thickness (mm)	Model
SS, D2S, D2SW	0.18	Separator for SS0.18
	0.4	Separator for SS0.4


■ Contact Form

SPDT




\*Indicates the color of the lead wire.

SPST-NC




SPST-NO




# Dimensions

## ■ Terminals


### Solder Terminals (H)

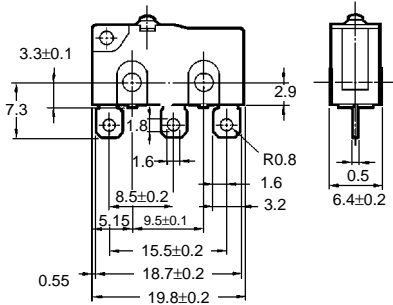

### Quick-connect Terminals (#110) (T)

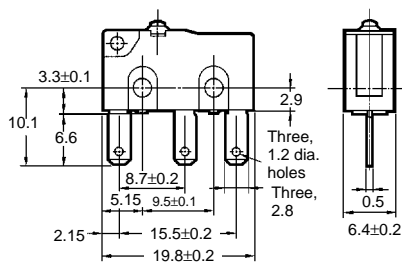

### PCB Terminals (D)

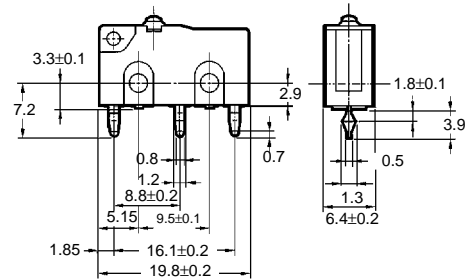


## ■ Dimensions and Operating Characteristics

- Note:**
1. All units are in millimeters unless otherwise indicated.
  2. The following illustrations and dimensions are for models with soldered terminals. Refer to *Terminals* for models with quick-connect and PCB terminals (#110).
  3. The dimensions not described are the same as those of models with pin plungers.
  4. Unless otherwise specified, tolerance of  $\pm 0.4$  mm applies to all dimensions.
  5. The □ in the model number is for a terminal code such as H, T, D, or M.

### Terminal Models

#### Pin Plunger



- D2SW-3□
- D2SW-01□

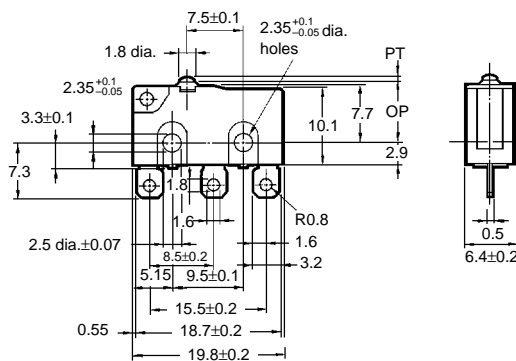

OF	1.77 N {180 gf}
RF min.	0.29 N {30 gf}
PT max.	0.6 mm
OT min.	0.5 mm
MD max.	0.1 mm
OP	8.4±0.3 mm

#### Hinge Lever



- D2SW-3L1□
- D2SW-01L1□

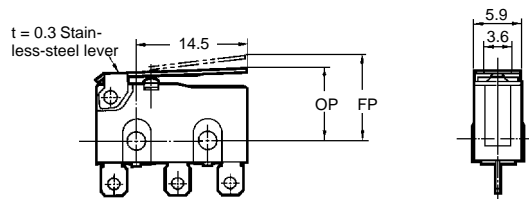

OF	0.59 N {60 gf}
RF min.	0.06 N {6 gf}
OT min.	1.0 mm
MD max.	0.8 mm
FP max.	13.6 mm
OP	8.8±0.8 mm

#### Simulated Hinge Lever



- D2SW-3L3□
- D2SW-01L3□

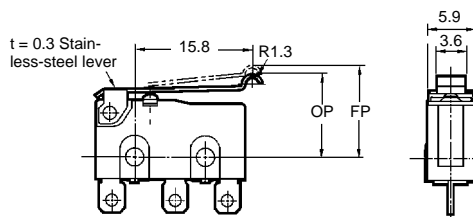

OF	0.59 N {60 gf}
RF min.	0.06 N {6 gf}
OT min.	1.0 mm
MD max.	0.8 mm
FP max.	15.5 mm
OP	10.7±0.8 mm

**Hinge Roller Lever**



D2SW-3L2□  
D2SW-01L2□

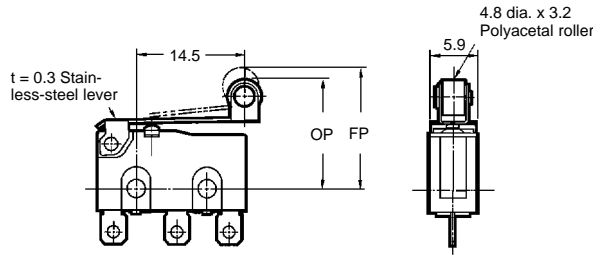

<b>OF</b>	0.59 N {60 gf}
<b>RF min.</b>	0.06 N {6 gf}
<b>OT min.</b>	1.0 mm
<b>MD max.</b>	0.8 mm
<b>FP max.</b>	19.3 mm
<b>OP</b>	14.5±0.8 mm

**Lead Wire Model  
Pin Plunger**

D2SW-3M  
D2SW-01M

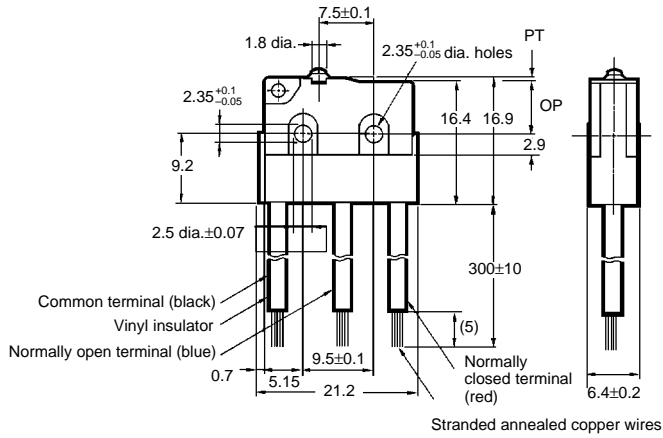

<b>OF max.</b>	1.77 N {180 gf}
<b>RF min.</b>	0.29 N {30 gf}
<b>PT max.</b>	0.6 mm
<b>OT min.</b>	0.5 mm
<b>MD max.</b>	0.1 mm
<b>OP</b>	8.4±0.3 mm

## Precautions


### ■ Cautions

#### Mounting Dimensions


Use two M3 mounting screws with spring washers to mount the Switch. Tighten the screws to a torque of 0.23 to 0.26 N • m {2.3 to 2.7 kgf • cm}.

#### Mounting Holes

Two, 2.4-dia. mounting hole or M2.3 screw hole




#### PCB Mounting



#### Degree of Protection

The D2SW was tested underwater and passed the following watertightness tests, which however, does not mean that the D2SW can be used in the water.

IEC Publication 529, degree of protection IP67. Refer to the following illustration for the test method.



#### Protection Against Chemicals


Prevent the Switch from coming into contact with oil and chemicals. Otherwise, damage to or deterioration of Switch materials may result.

#### ■ Correct Use

Refer to pages 22 to 29 for common precautions.

#### Operation

With the pin plunger models, set the Switch so that the plunger can be pushed in from directly above. Since the plunger is covered with a rubber cap, applying a force from lateral directions may cause damage to the plunger or reduction in the sealing capability.

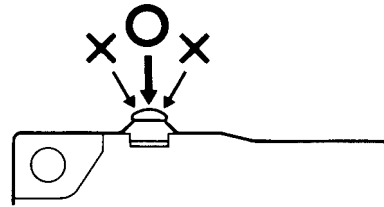

#### Handling

Handle the Switch carefully so as not to break the sealing rubber of the plunger.

#### ■ Connector

Refer to terminal connections on page 214.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.