


A Single-pole, 16-A Power Relay

- Low profile: 15.7 mm in height
- Clearance and creepage distance
Between coil and contacts: 8 mm/8 mm
Between contacts of the same polarity: 3 mm/4 mm
- Inrush peak currents up to 100 A (DC models only)

RoHS Compliant

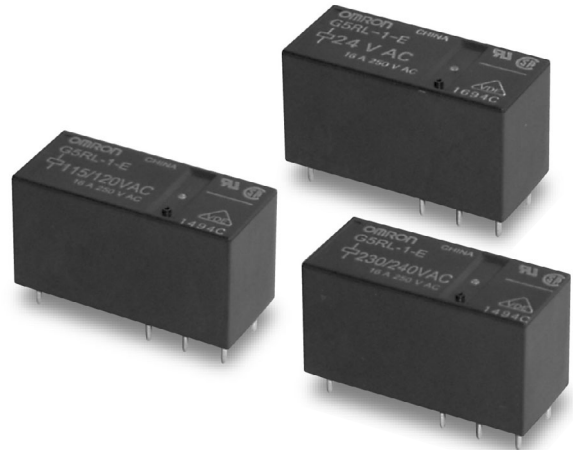

Ordering Information

Classification		Enclosure ratings	Special Function	Coil Ratings	Contact form	
					SPST-NO	SPDT
Class F	High capacity	Flux protection	---	AC coil	---	G5RL-1-E
			High inrush	DC coil	G5RL-1A-E-HR	G5RL-1-E-HR

Note: When ordering, add the rated coil voltage to the model number.

Examples: G5RL-1-E-HR 12 VDC
└─ Rated coil voltage

G5RL-1-E 100 VAC
└─ Rated coil voltage

■ Model Number Legend:

G5RL-□□□-□ □VDC (VAC)

1 2 3 4 5

1. Number of Poles

1: 1 pole

2. Contact Form/Contact Construction

None: SPDT

A: SPST-NO

3. Classification

E: High-capacity

4. Special function

HR: High-inrush (DC models only)

5. Rated Coil Voltage

Refer to "Coil Ratings" on page 2.

Specifications

■ Coil Ratings

Rated voltage (AC coil)	24 VAC	100 VAC	115 VAC/120 VAC		200 VAC	230 VAC/240 VAC	
Rated current at 50 Hz (mA)	31.30	7.50	5.85	6.25	3.75	3.00	3.13
Rated current at 60 Hz (mA)	28.30	6.88	5.35	5.70	3.45	2.76	2.88
Coil resistance (Ω)	443	8,220	11,600		33,000	47,600	
Must operate voltage	75% of rated voltage (max.)						
Must release voltage	15% of rated voltage (min.)						
Max. voltage	90% to 110% of rated voltage						
Power consumption	Approx. 0.75 VA						

- Note:**
1. The above items are measured at a coil temperature of 23°C.
 2. The tolerance of the rated current is +15%/–20%.
 3. Power consumption drop was measured at 50 Hz.
 4. Coil resistances are provided as reference values.

Rated voltage (DC coil)	5 VDC	12 VDC	24 VDC	48 VDC
Rated current (mA)	80.0	33.3	16.7	8.96
Coil resistance (Ω)	62.5	360	1,440	5,358
Must operate voltage	70% of rated voltage (max.)			
Must release voltage	10% of rated voltage (min.)			
Max. voltage	130% of rated voltage			
Power consumption	Approx. 400 mW			Approx. 430 mW

- Note:**
1. The above items are measured at a coil temperature of 23°C.
 2. The tolerance of the rated current is $\pm 10\%$.

■ Contact Ratings

Contact material	Ag alloy (Cd free)
Load	Resistive load ($\cos \phi=1$)
Rated load	16 A at 250 VAC (NO), 16 A at 24 VDC (NO), 5 A at 250 VAC (NC), 5 A at 24 VDC (NC)
Rated carry current	16 A (NO), 5 A (NC)
Max. switching voltage	250 VAC, 24 VDC
Max. switching current	16 A (NO), 5 A (NC)
Max. switching power	4,000 VA AC (NO), 1,250 VA AC (NC) 384 W DC (NO), 120 W DC (NC)
Failure rate (reference value)	40 mA at 24 VDC

- Note:** P level: $\lambda_{60} = 0.1 \times 10^{-6}$ operations

■ Characteristics

Item	DC coil	AC coil
Contact resistance	100 mΩ max.	
Operate time	15 ms max.	20 ms max.
Release time	5 ms max.	20 ms max.
Max. switching frequency	Mechanical: 18,000 operations/h Electrical: 1,800 operations/h (under rated load)	
Insulation resistance	1,000 MΩ min. (at 500 VDC)	
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between contacts of same polarity 6,000 VAC, 50/60 Hz for 1 min between coil and contacts	
Impulse withstand voltage	10 kV between coil and contacts (1.2 × 50 μs)	
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 1.5-mm double amplitude Malfunction: 10 to 55 to 10 Hz, 1.5-mm double amplitude	
Shock resistance	Destruction: 1,000 m/s ² (approx. 100 G) Malfunction: 100 m/s ² (approx. 10 G)	
Endurance	Mechanical: 10,000,000 operations min. (at 18,000 operations/h) Electrical: 50,000 operations min. (Resistive load, 16 A, 250 VAC, NO contact) (Resistive load, 16 A, 24 VDC, NO contact) (Resistive load, 5 A, 250 VAC, NC contact) (Resistive load, 5 A, 24 VDC, NC contact)	
Ambient temperature	Operating: -40°C to 85°C (with no icing)	Operating: -40°C to 70°C (with no icing)
Ambient humidity	Operating: 5% to 85%	
Weight	Approx. 10 g	

■ Approved Standards

UL 508 (File No. E41643 Vol. 4 Sec.38) and CSA C22.2 No. 1, C22.2 No. 14 (Certificate No.: 1419093)


Model	Coil Rating	Contact rating
G5RL-1(A)-E-HR	5 to 48 VDC	116 A, 277 VAC General, 50,000 operations - NO 16 A, 250 VAC General, 50,000 operations - NO TV-5, 25,000 operations - NO A300 Pilot Duty, 720 VA, 240 VAC, 30,000 operations - NO
G5RL-1-E	24 to 240 VAC	1/2 Hp, 120 VAC, 6,000 operations - NO 60 LRA/10 FLA, 250 VAC, 6,000 operations - NO 5 A, 250 VAC General, 50,000 operations - NC 5 A, 24 VDC Resistive, 50,000 operations - NC

VDE DIN EN 61810-1 Edition 2 and EN60255-25 (Reg. No. A282)

Model	Coil Rating	Contact rating
G5RRL-1(A)-E-HR	5, 12, 24, 48 V	16 A at 250 VAC cosφ=1 15,000 operations - NO 240 VAC 100 A (0-P) Steady 10 A (rms) 50,000 operations - NO 240 VAC 50 A (0-P) Steady 5 A (rms) 10,000 operations - NO
G5RL-1-E	24, 100, 115/120, 200, 230/240 VAC (50 Hz)	16 A, 250 VAC 15,000 operations - NO

Dimensions

Note: All units are in millimeters unless otherwise indicated.

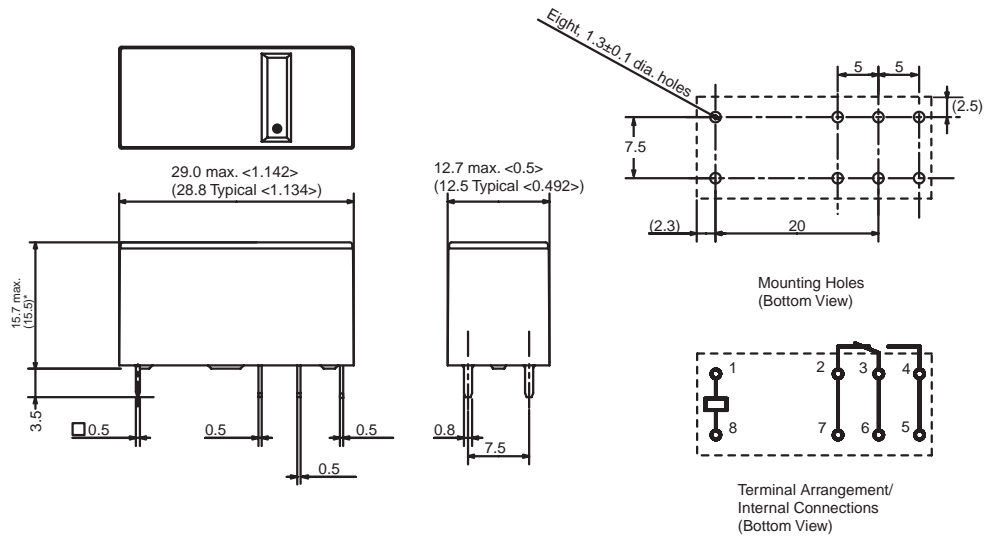

Precautions

Disclaimer:

All technical performance data applies to the product as such; specific conditions of individual applications are not considered. Always check the suitability of the product for your intended purpose. OMRON does not assume any responsibility or liability for noncompliance herein, and we recommend prior technical clarification for applications where requirements, loading, or ambient conditions differ from those applying to general electric applications. Any responsibility for the application of the product remains with the customer alone. THIS COMPONENT CAN NOT BE USED FOR AUTOMOTIVE APPLICATIONS.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. K129-E1-03 **In the interest of product improvement, specifications are subject to change without notice.**

OMRON RELAY & DEVICES Corporation

C & C Power Relay Division

Marketing Department

1110, Sugi, Yamaga-city, Kumamoto-Pref., 861-0596 Japan

Tel: (81)968-44-4160/Fax: (81)968-44-4107

Printed in Japan

0406-0.5M (1204) (M)